


# SPREADER

## MATERIAL APPLICATION GUIDE

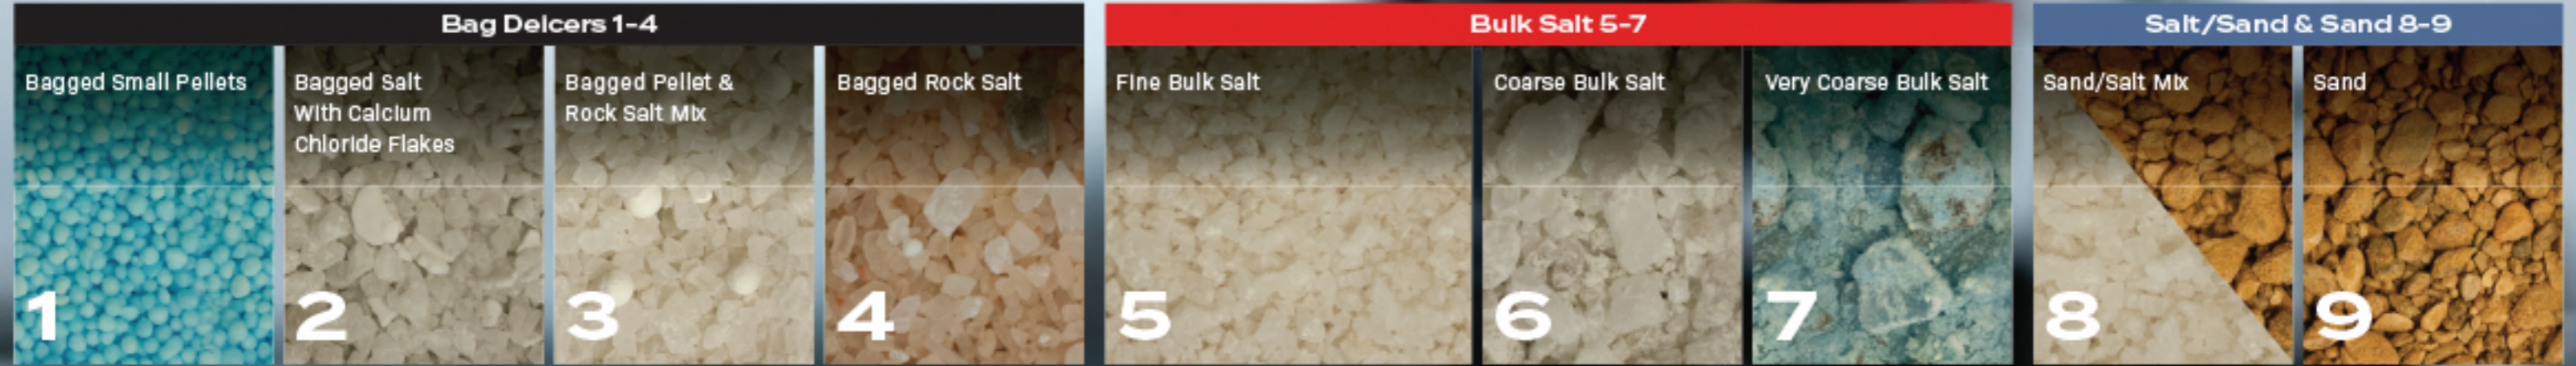

										
1 2 3 4	1 2 3 4	2 3 4 5 6 7	5 6 7 8 9	2 3 4 5 6 7	2 3 4 5 6 7	1 2 3 4 5 6 7 8 9	5 6 7 8*	5 6 7 8* 9*	5 6 7 8*	5 6 7 8* 9*
WBX Series	TGS 300	TGS 600	TGS 800	TGS 1100	QuickCube®	EXACT PATH®	VBX AUGER	VBX PINTLE	VBX+ AUGER	VBX+ PINTLE
							VBX 3000   VBX 6500 VBX 8000   VBX 9000	VBX 8500   VBX 8000 VBX 9000		

NOTE: Assumes dry, free-flowing material. Vibrators should not run continuously. The selection of proper deicing materials can be complex and varies by personal preference, experience and environmental concerns. All factors should be considered before making your selection. \*Materials that recommend a vibrator.